


REBAR BENDER

KMB-16



KMB-25

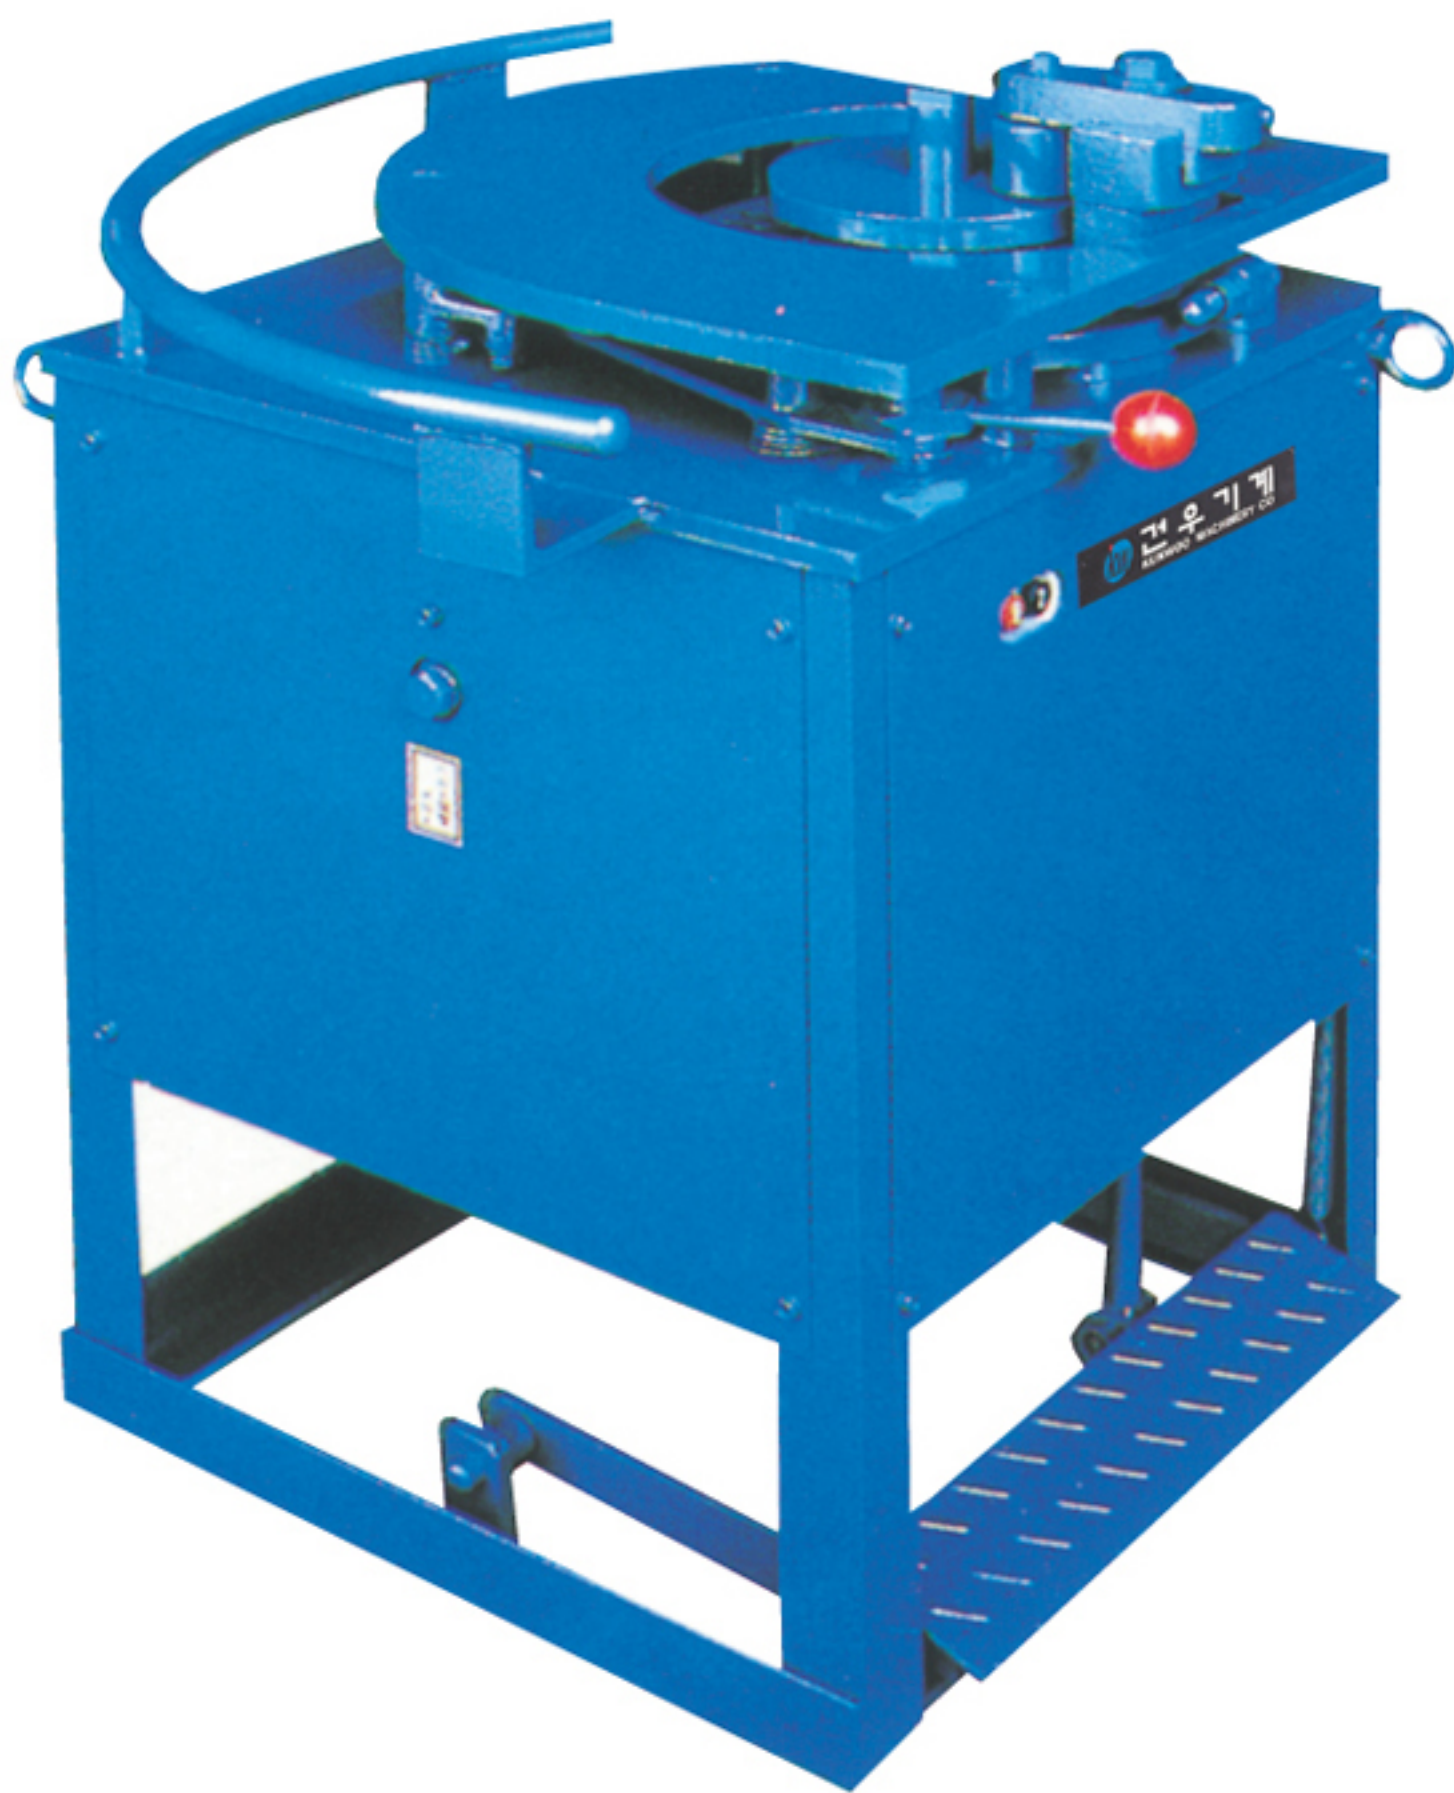

KMB-32L



FEATURES

- ▶ Easily portable since the weight of this machine is the lightest in Korea. Strong and firm with a durability-oriented design.
- ▶ There are two knobs to adjust angle range.
When you set up the required angle range, it automatically bend to the set angle range.
So, to convert working of angle ranges is simple and easy. The adjustable angle range is from 0° to 180°.
- ▶ Use of electromagnetic clutch for the motor maintaining a certain amount of power.
Convenient A/S in case of mechanical trouble.
- ▶ A foot switch is available for automatic bending.
- ▶ Suitable for small and middle works.
- ▶ Simple attachment of the Roller on the machine allows the users to do the Round folding (R200, 250, 300) necessary for any civil engineering work.(Option)

SPECIFICATIONS

Model	Max.bardia	Power	Electrics	Bending speed	Bending angle	Dimension(m/m)			Weight	Remarks
						L	W	H		
KMB-16	16mm	2.2kw/3HP	110/220V 50/60HZ 3Phase	1.5sec/180°	~180°	650	650	750	180kg	rpm26
KMB-25	25mm	2.2kw/3HP	110/220V 50/60HZ 1Phase	6sec/180°	~180°	450	400	350	110kg	
KMB-32L	32mm	4.4kw/6HP	110/220V 50/60HZ 1Phase	6sec/180°	~180°	640	570	570	196kg	

EFFICIENCY/No. of bars at one time

SD400

Bar dia Model	D10	D13	D16	D19	D22	D25	D29	D32	Remarks
KMB-16	4/4	3/3	1/1						
KMB-25	4/4	3/3	2/2	1/1	1/1	1/0			
KMB-32L	5/5	4/4	3/3	2/2	2/2	1/1	1/1	1/1	