

REBAR RING & U-BENDER

KRB-25



KRB-32



FEATURES

- ▶ The circled steel diameter range from 140mm to 1900mm. The round bending is possible.
- ▶ The steel bending process can be done to the exact measurement in the round bending process.
- ▶ It is useful in various public works such as a bridge, a subway, and basic file.

SPECIFICATIONS


Model	Max.bardia	Power	Electrics	Bending speed	Bending angle	Dimension(m/m)			Weight	Remarks
						L	W	H		
KRB-25	25mm	2.2kw/3HP	220/380V 50/60HZ 3Phase	360°/4sec	~360°	700	640	755	256kg	Min Diameter : 140mm
KRB-32	32mm	2.2kw/3HP	220/380V 50/60HZ 3Phase	360°/4sec	~360°	750	670	800	350kg	Min Diameter : 300mm

KMU-32



FEATURES

- ▶ Maximized power by powerful hydraulic works.
- ▶ Compatible use for both U and Ring bending.

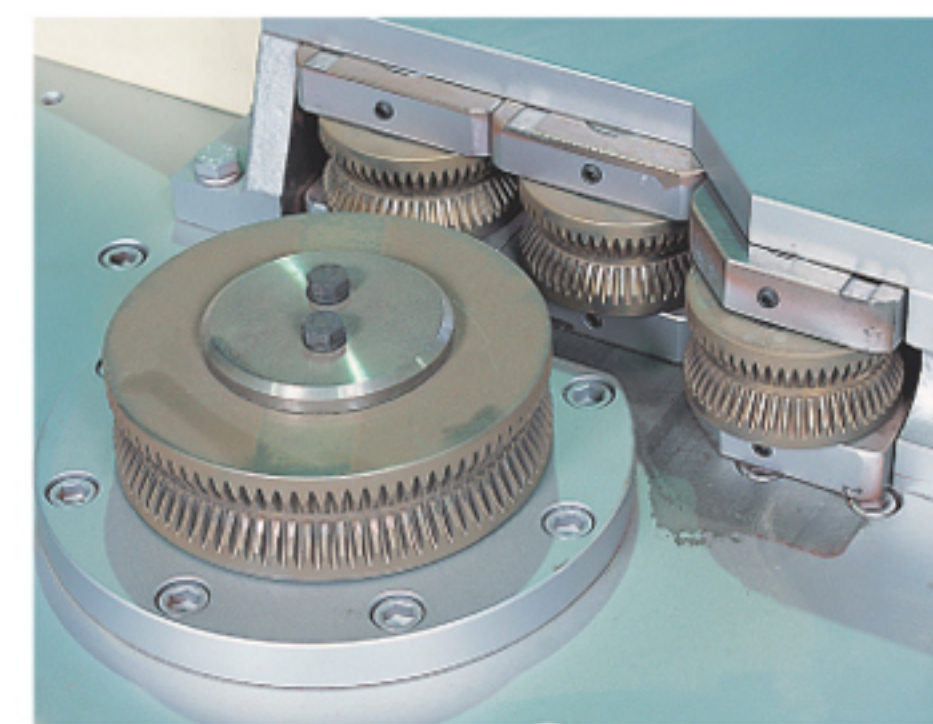

■ Roller

SPECIFICATIONS

Model	Max.bardia	Power	Electrics	Bending angle	Dimension(m/m)			Weight	Remarks
					L	W	H		
KMU-32	32mm	3.75kw 2.2kw	220/380V 50/60HZ 3Phase	~360°	1,230	800	878	840kg	Oil Tank 70 l

BENDING FORM

U-BAR		Min : 300mm
		Max : Infinity

RING-BAR		Min : 300mm
		Max : 6,000mm